




XE910-4G

Industrial Terminal

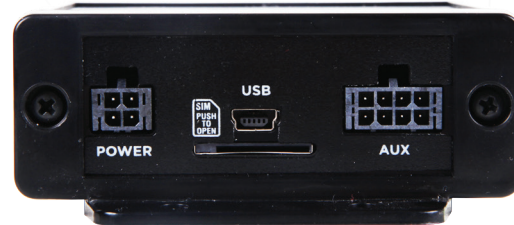

Product

2G bands (MHz)
3G bands (MHz)
4G bands (MHz)
Upload HSUPA (Mbps)
Download HSDPA (Mbps)
Supply Voltage Range
Battery
RS-232 Interface
USB Interface
GPIO Interface
Cellular Antenna Connector
Sim Card Holder
Operating Status LED's
Software
Dimension
Weight
Extended Temperature Range

XE910-4G

B3(1800),B8(900)
B2(2100),B8(900)
B1(2100),B3(1800),B7(2600),B8(900),B20(800)
50 Mbps
150 Mbps
9-35VDC @ 1.2A min
Li-Ion 3.7V 960mAh (Optional)
D-sub 9-pole female socket
USB 2.0 (Mini B)
"RS485 - Transceiver with AutoDirection Control 2 Output (Relay Driver Max 12V @ 150mA) 2 Input (Optical isolator 9-24V DC) 1 Analog Input (0-5V DC)"
SMA (female) , Rx Diversity (female)
Push Push Type
Power / Status
"AppZone application resources Programming language (C) , IDE (Eclipse) Memory: 5 MB Ram , 2 MB Flash"
85 x 80 x 30 mm
140 grams (without battery)
-40°C to +85°C (Operational)